

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 August 2002 (15.08.2002)

PCT

(10) International Publication Number
WO 02/063714 A1

(51) International Patent Classification⁷: **H01Q 1/36**,
1/24, 9/04, 1/38

(21) International Application Number: **PCT/EP01/01287**

(22) International Filing Date: 7 February 2001 (07.02.2001)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **FRAC-**
TUS, S.A. [ES/ES]; Gran Capitán, 2 - Despacho 303, Edi-
ficio NEXUS, E-08034 Barcelona (ES).

(71) Applicant (for US only): **ANGUERA PROS, Jaume**
[ES/ES]; Psg. Blasco Ibañez, 15, E-12500 Vinarós (ES).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PUENTE**

BALIARDA, Carles [ES/ES]; Gran Capitán, 2 - Despacho
303, Edificio Nexus, E-08034 Barcelona (ES). **BORJA**
BORAU, Carmen [ES/ES]; Tvra. de Dalt, 67, E-08024
Barcelona (ES).


(74) Agent: **CARPINTERO LOPEZ, Francisco**; Herrero &
Asociados, S.L., Alcalá 35, E-28014 Madrid (ES).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LI, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GI, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

[Continued on next page]

(54) Title: **MINIATURE BROADBAND RING-LIKE MICROSTRIP PATCH ANTENNA**

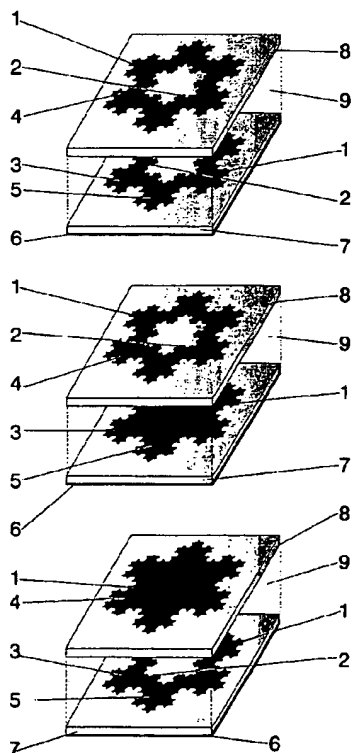

(57) Abstract: A miniature broadband stacked microstrip patch antenna formed by two patches., an active and a parasitic patches, where at least one of them is defined by a Ring-Like Space-Filling Surface (RSFS) being this RSFS newly defined in the present invention. By means of this novel technique, the size of the antenna can be reduced with respect to prior art, or alternatively, given a fixed size the antenna can operate at a lower frequency with respect to a conventional microstrip patch antenna of the same size and with enhanced bandwidth. Also, the antennas feature a high-gain when operated at a high order mode.

BEST AVAILABLE COPY

WO 02/063714 A1



IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

MINIATURE BROADBAND RING-LIKE MICROSTRIP PATCH ANTENNA**MINIATURE BROADBAND RING-LIKE MICROSTRIP PATCH ANTENNA****TECHNICAL FIELD**

5 The present invention refers to a new family of microstrip patch antennas of reduced size and broadband behaviour based on an innovative set of curves named space-filling curves (SFC). The invention is specially useful in the environment of mobile communication devices (cellular telephony, cellular
10 pagers, portable computers and data handlers, etc.), where the size and weight of the portable equipments need to be small.

BACKGROUND OF THE INVENTION

15 An antenna is said to be a small antenna (a miniature antenna) when it can be fitted in a space which is small compared to the operating wavelength. More precisely, the radiansphere is taken as the reference for classifying an antenna as being small. The radiansphere is an imaginary sphere of radius equal to the
20 operating wavelength divided by two times π ; an antenna is said to be small in terms of the wavelength when it can be fitted inside said radiansphere.

The fundamental limits on small antennas where theoretically established by H.Wheeler and L.J.Chu in the middle 1940's. They basically stated that a small
25 antenna has a high quality factor (Q) because of the large reactive energy stored in the antenna vicinity compared to the radiated power. Such a high quality factor yields a narrow bandwidth; in fact, the fundamental limit derived in such theory imposes a maximum bandwidth given a specific size of an small antenna. Other characteristics of a small antenna are its small radiating
30 resistance and its low efficiency.

The development of innovative structures that can efficiently radiate from a small space has an enormous commercial interest, especially in the

environment of mobile communication devices (cellular telephony, cellular pagers, portable computers and data handlers, to name a few examples), where the size and weight of the portable equipments need to be small. According to R.C.Hansen (R.C.Hansen, "Fundamental Limitations on Antennas," Proc.IEEE, vol.69, no.2, February 1981), the performance of a small antenna depends on its ability to efficiently use the small available space inside the imaginary radiansphere surrounding the antenna. In the present invention, a novel set of geometries named ring-like space-filling surfaces (RSFS) are introduced for the design and construction of small antennas that improves the performance of other classical microstrip patch antennas described in the prior art.

A general configuration for microstrip antennas (also known as microstrip patch antennas) is well known for those skilled in the art and can be found for instance in (D.Pozar, "Microstrip Antennas: The Analysis and Design of Microstrip Antennas and Arrays". IEEE Press, Piscataway, NJ 08855-1331). The advantages such antennas compared to other antenna configurations are its low, flat profile (such as the antenna can be conformally adapted to the surface of a vehicle, for instance), its convenient fabrication technique (an arbitrarily shaped patch can be printed over virtually any printed circuit board substrate), and low cost. A major draw-back of this kind of antennas is its narrow bandwidth, which is further reduced when the antenna size is smaller than a half-wavelength. A common technique for enlarging the bandwidth of microstrip antennas is by means of a parasitic patch (a second patch placed on top of the microstrip antenna with no feeding mechanism except for the proximity coupling with the active patch) which enhances the radiation mechanism (a description of the parasitic patch technique can be found in J.F.Zurcher and F.E.Gardioli, "Broadband Patch Antennas", Artech House 1995.). A common disadvantage for such an stacked patch configuration is the size of the whole structure.

SUMMARY OF THE INVENTION

In this sense the present invention discloses a technique for both reducing the size of the stacked patch configuration and improving the bandwidth with respect to the prior art. This new technique can be obviously combined with
5 other prior art miniaturization techniques such as loading the antenna with dielectric, magnetic or magnetodielectric materials to enhance the performance of prior art antennas.

The advantage of the present invention is obtaining a microstrip patch antenna of
10 a reduced size when compared to the classical patch antennas, yet performing with a large bandwidth. The proposed antenna is based on a stacked patch configuration composed by a first conducting surface (the active patch) substantially parallel to a conducting ground counterpoise or ground-plane, and a
15 second conducting surface (the parasitic patch) placed parallel over such active patch. Such parasitic patch is placed above the active patch so the active patch is placed between said parasitic patch and said ground-plane. One or more feeding sources can be used to excite the said active patch. The feeding element of said active patch can be any of the well known feeding element described in the prior art (such as for instance a coaxial probe, a co-planar microstrip line, a capacitive
20 coupling or an aperture at the ground-plane) for other microstrip patch antennas.

The essential part of the invention is the particular geometry of either the active or the parasitic patches (or both). Said geometry (RSFS) consists on a ring, with an outer perimeter enclosing the patch and an inner perimeter defining a region
25 within the patch with no conducting material. The characteristic feature of the invention is the shape of either the inner or outer perimeter of the ring, either on the active or parasitic patches (or in both of them). Said characteristic perimeter is shaped as an space-filling curve (SFC), i.e., a curve that is large in terms of physical length but small in terms of the area in which the curve can be included.
30 More precisely, the following definition is taken in this document for a space-filling curve: a curve composed by at least ten segments which are connected in such a

way that each segment forms an angle with their neighbours, i.e., no pair of adjacent segments define a larger straight segment, and wherein the curve can be optionally periodic along a fixed straight direction of space if and only if the period is defined by a non-periodic curve composed by at least ten connected segments
5 and no pair of said adjacent and connected segments define a straight longer segment. Also, whatever the design of such SFC is, it never intersects with itself at any point except the initial and final points (that is, the whole curve is arranged as a closed loop defining either the inner or outer perimeter of one patch within the antenna configuration). Due to the angles between segments, the physical
10 length of said space-filling curve is always larger than that of any straight line that can be fitted in the same area (surface) as said space-filling curve. Additionally, to properly shape the structure of the miniature patch antenna according to the present invention, the segments of the SFC curves must be shorter than a tenth of the free-space operating wavelength.

15

The function of the parasitic patch is to enhance the bandwidth of the whole antenna set. Depending on the thickness and size constrain and the particular application, a further size reduction is achieved by using the same essential configuration for the parasitic patch placed on top of the active patch.

20

It is precisely due to the particular SFC shape of the inner or outer (or both) perimeters of the ring on either the active or parasitic patches that the antenna features a low resonant frequency, and therefore the antenna size can be reduced compared to a conventional antenna. Due to such a particular geometry of the
25 ring shape, the invention is named Microstrip Space-Filling Ring antenna (also MSFR antenna). Also, even in a solid patch configuration with no central hole for the ring, shaping the patch perimeter as an SFC contributes to reduce the antenna size (although the size reduction is in this case not as significant as in the ring case).

30

The advantage of using the MSFR configuration disclosed in the present document (Fig.1) is threefold:

- (a) Given a particular operating frequency or wavelength, said MSFR antenna has a reduced electrical size with respect to prior art.
 - 5 (b) Given the physical size of the MSFR antenna, said antenna can operate at a lower frequency (a longer wavelength) than prior art.
 - (c) Given a particular operating frequency or wavelength, said MSFR antenna has a larger impedance bandwidth with respect to prior art.
- 10 Also, it is observed that when these antennas are operated at higher order frequency modes, they feature a narrow beam radiation pattern, which makes the antenna suitable for high gain applications.

As it will be readily notice by those skilled in the art, other features such as cross-
15 polarization or circular or elliptical polarization can be obtained applying to the newly disclosed configurations the same conventional techniques described in the prior art.

BRIEF DESCRIPTION OF THE DRAWINGS

20

Fig.1 Shows three different configurations for an MSFR antenna, with a RSFS for the active patch and parasitic patch(top), RSFS only for the parasitic patch (middle) or the RSFS for the active patch (bottom).

25 Fig.2 Shows three different configurations for an MSFR antenna where the centre of active and parasitic patch do not lie on the same perpendicular axis to the groundplane.

Fig.3 Describes several RSFS examples wherein the outer and inner perimeters
30 are based on the same curve and with the same number of segments.

Fig.4 Shows several RSFS examples based on the same curve wherein the outer and inner perimeter have different lengths for each case.

Fig.5 Shows RSFS examples wherein the outer and inner perimeters are based
5 on different curves with equal and not-equal number of segments.

Fig.6 Shows RSFS examples as those in Fig.3, based on different SFC.

Fig.7 More RSFS examples as those in Fig.6
10

Fig.8 Describes some RSFS examples where the centre of the whole structure do not coincide with the centre of the removed part.

Fig. 9 Shows RSFS examples with different SFC for the inner and outer perimeter
15 and with the centre of the whole structure placed different than the centre of the removed part.

Fig. 10 Describes RSFS examples where the outer perimeter is a SFC (figures a and b) and the inner perimeter is a classical Euclidean curve (e.g. square, circle,
20 triangle...). Figures c and d where the outer perimeter is a conventional polygonal geometry (e.g. square, circle, triangle...) and where the inner perimeter is a SFC.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

25 Fig. 1 describes three preferred embodiments for a MSFR antenna. The top one describes an antenna formed by an active patch (3) over a ground plane (6) and a parasitic patch (4) placed over said active patch where at least one of the patches is a RSFS (e.g. FIG.1 (top) both patches are a RSFS, only the parasitic patch is a RSFS (middle) and only the active patch is a RSFS (bottom)). Said active and
30 parasitic patches can be implemented by means of any of the well-known techniques for microstrip antennas already available in the state of the art, since

its implementation is not relevant to the invention. For instance, the patches can be printed over a dielectric substrate (7 and 8) or can be conformed through a laser cut process upon a metallic layer. Any of the well-known printed circuit fabrication techniques can be applied to pattern the RSFS over the dielectric substrate. Said

5 dielectric substrate can be for instance a glass-fibre board, a teflon based substrate (such as Cuclad[®]) or other standard radiofrequency and microwave substrates (as for instance Rogers 4003[®] or Kapton[®]). The dielectric substrate can even be a portion of a window glass if the antenna is to be mounted in a motor vehicle such as a car, a train or an airplane, to transmit or receive radio, TV,

10 cellular telephone (GSM 900, GSM 1800, UMTS) or other communication services of electromagnetic waves. Of course, a matching network can be connected or integrated at the input terminals of the active patch. The medium (9) between the active (3) and parasitic patch (4) can be air, foam or any standard radio frequency and microwave substrate. The said active patch feeding scheme

15 can be taken to be any of the well-known schemes used in prior art patch antennas, for instance: a coaxial cable with the outer conductor connected to the ground-plane and the inner conductor connected to the active patch at the desired input resistance point (5). Of course the typical modifications including a capacitive gap on the patch around the coaxial connecting point or a capacitive

20 plate connected to the inner conductor of the coaxial placed at a distance parallel to the patch, and so on can be used as well. Examples of other obvious feeding mechanisms are for instance a microstrip transmission line sharing the same ground-plane as the active patch antenna with the strip capacitively coupled to the active patch and located at a distance below the said active patch; in another

25 embodiment the strip is placed below the ground-plane and coupled to the active patch through an slot, and even a microstrip transmission line with the strip coplanar to the active patch. All these mechanisms are well known from prior art and do not constitute an essential part of the present invention. The essential part of the present invention is the shape of the active patch and parasitic (in this case

30 the RSFS geometry) which contributes to reducing the antenna size with respect to prior art configurations and enhances the bandwidth.

The dimensions of the parasitic patch is not necessarily the same than the active patch. Those dimensions can be adjusted to obtain resonant frequencies substantially similar with a difference less than a 20% when comparing the resonances of the active and parasitic elements.

Fig. 2 describes an other preferred embodiment where the centre of the said active (3) and parasitic patches (4) are not aligned on the same perpendicular axis to the groundplane (7). The top figure describes a horizontal and vertical misalignment, the middle describes a horizontal misalignment and the bottom describes a vertical misalignment. This misalignment is useful to control the beamwidth of the radiation pattern.

To illustrate several modifications either on the active patch or the parasitic patch, several examples are presented. Fig. 3 describes some RSFS either for the active or the parasitic patches where the inner (1) and outer perimeters (2) are based on the same SFC. Fig. 4 describes an other preferred embodiment with different inner perimeter length. This differences on the inner perimeter are useful to slightly modify and adjust the operating frequency. Fig.5 describes an other preferred embodiment where the outer perimeter (1) of the RSFS is based on a different SFC than the inner (2) perimeter. Fig. 6 and 7 describes other preferred embodiments with other examples of SFC curves, where the inner (1) and outer (2) perimeters of the RSFS are based on the same SFC.

Fig.8 illustrates some examples where the centre of the removed part is not the same than the centre of the patch. This centre displacement is specially useful to place the feeding point on the active patch to match the MSFR antenna to a specific reference impedance. In this way the can features an input impedance above 5 Ohms.

Fig. 9 describes other preferred embodiments with several combinations: centre misalignments where the outer (1) and inner perimeters of the RSFC are based on different SFC.

- 5 Fig.10 Describes another preferred embodiment (figures a and b) where the outer perimeter (1) of the RSFS is a SFC and the inner perimeter is a conventional Euclidean curve (e.g. square, circle...). And examples illustrated in figures c and d where the outer perimeter of the RSFS (1) is a classical Euclidean curve (e.g. square, circle,...) and the inner perimeter (2) is a SFC.

10

Having illustrated and described the principles of our invention in several preferred embodiments thereof, it should be readily apparent to those skilled in the art that the invention can be modified in arrangement and detail without departing from such principles.

CLAIMS

- 1.- A miniature broadband microstrip patch antenna comprising at least two conducting parallel surfaces and a conducting ground plane or counter-poise, the conducting first surface acting as an active element being placed substantially parallel on top said ground plane and including a feeding point, the second surface acting as a parasitic element placed above of said first surface, said patch antenna characterized in that at least one of the said first or second conducting surfaces consists of a planar ring comprising an inner and outer perimeter wherein the shape of at least one of said perimeters is a space-filling curve, said space-filling curve being composed by at least ten segments, said segments connected with each adjacent segment, said adjacent segments forming an angle with their neighbours, no pair of adjacent segments defining a larger straight segment, wherein said space-filling curve never intersects with itself at any point except the initial and final points, and wherein said segments must be shorter than a tenth of the free-space operating wavelength to keep the antenna size reduced.
- 2.- A miniature broadband microstrip patch antenna according to claim 1, wherein at least one of said surfaces is displaced laterally such that the two axes that orthogonally cross the centre of both surfaces do not overlap, to control this way both the impedance bandwidth and the beamwidth of the radiation pattern.
- 3.- A miniature broadband microstrip patch antenna according to claims 1 or 2 wherein a dielectric, magnetic or magneto-dielectric material is placed below or above at least one of said first or second surfaces.
- 4.- A miniature broadband microstrip patch antenna according to claims 1, 2 or 3 wherein the resonant frequencies of the first and second surfaces are substantially similar with a difference less than a 20%.

5.- A miniature broadband microstrip patch antenna according to any of the previous claims wherein the center of said inner perimeter does not match the position of the center of said outer perimeter and the antenna features an input impedance above 5 Ohms.

5

6.- A miniature broadband microstrip patch antenna according to any of the previous claims wherein the antenna is operated at a frequency mode of larger order than the fundamental one to feature a high gain radiation pattern.

10

15

20

25

1/10

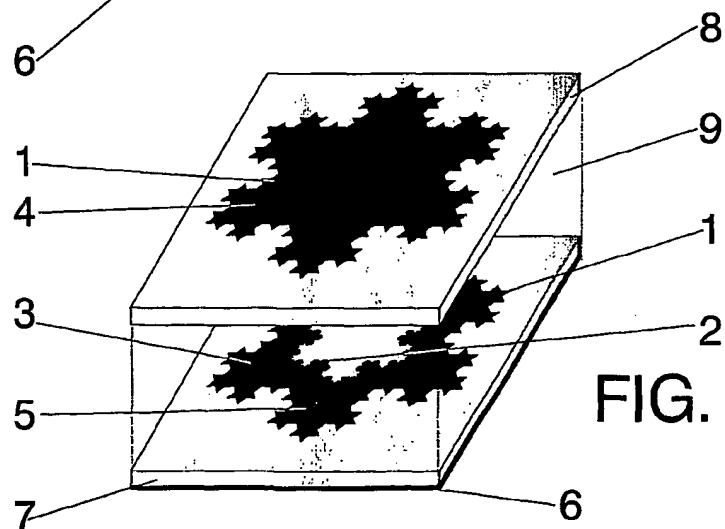
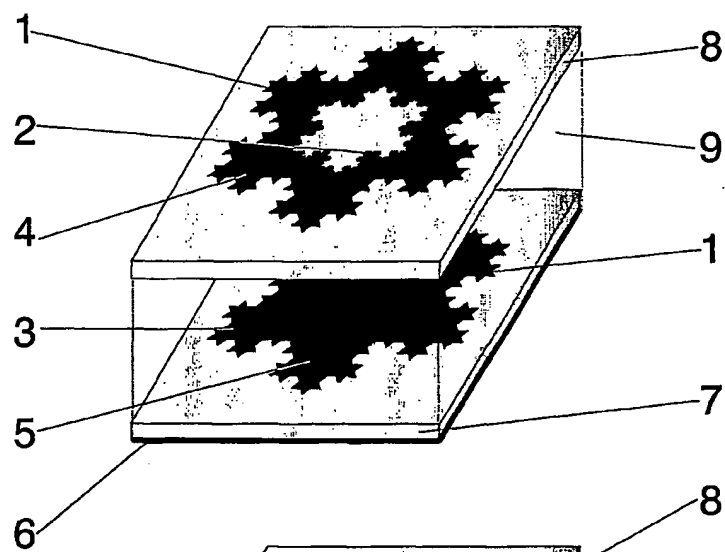
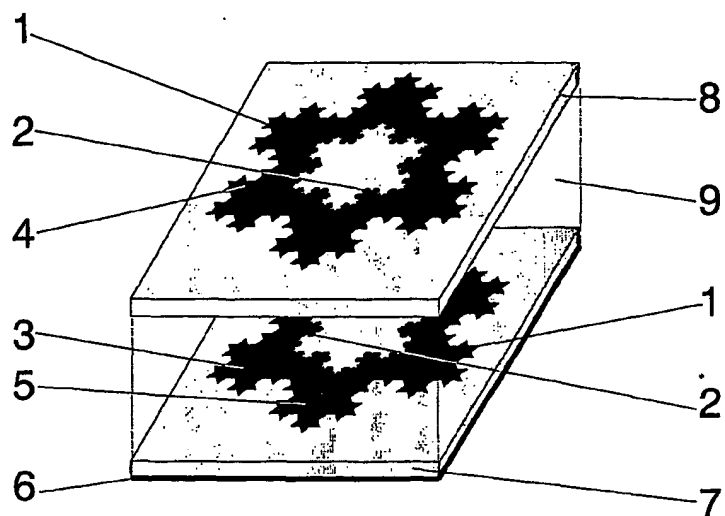


FIG. 1

SUBSTITUTE SHEET (RULE 26)

2/10

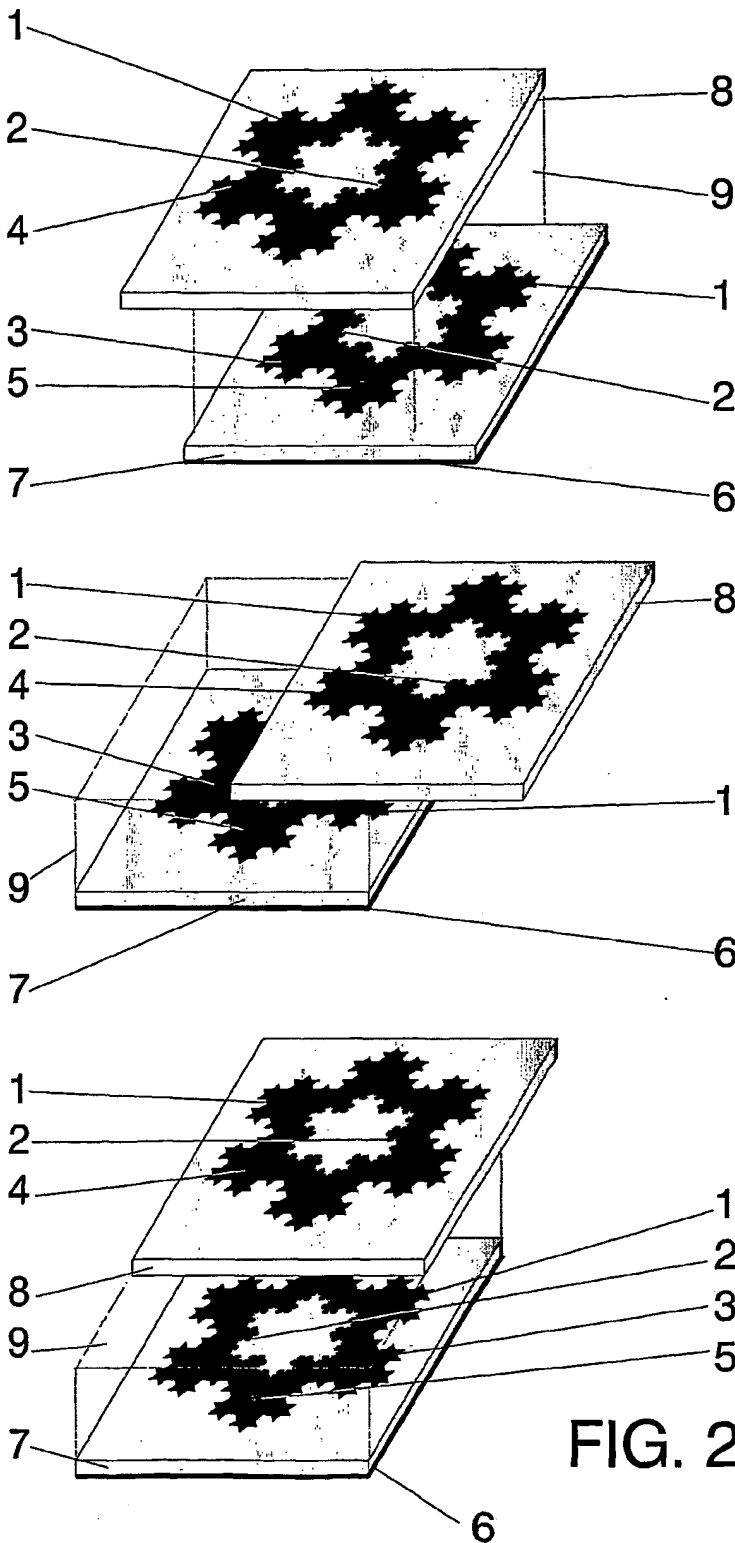


FIG. 2

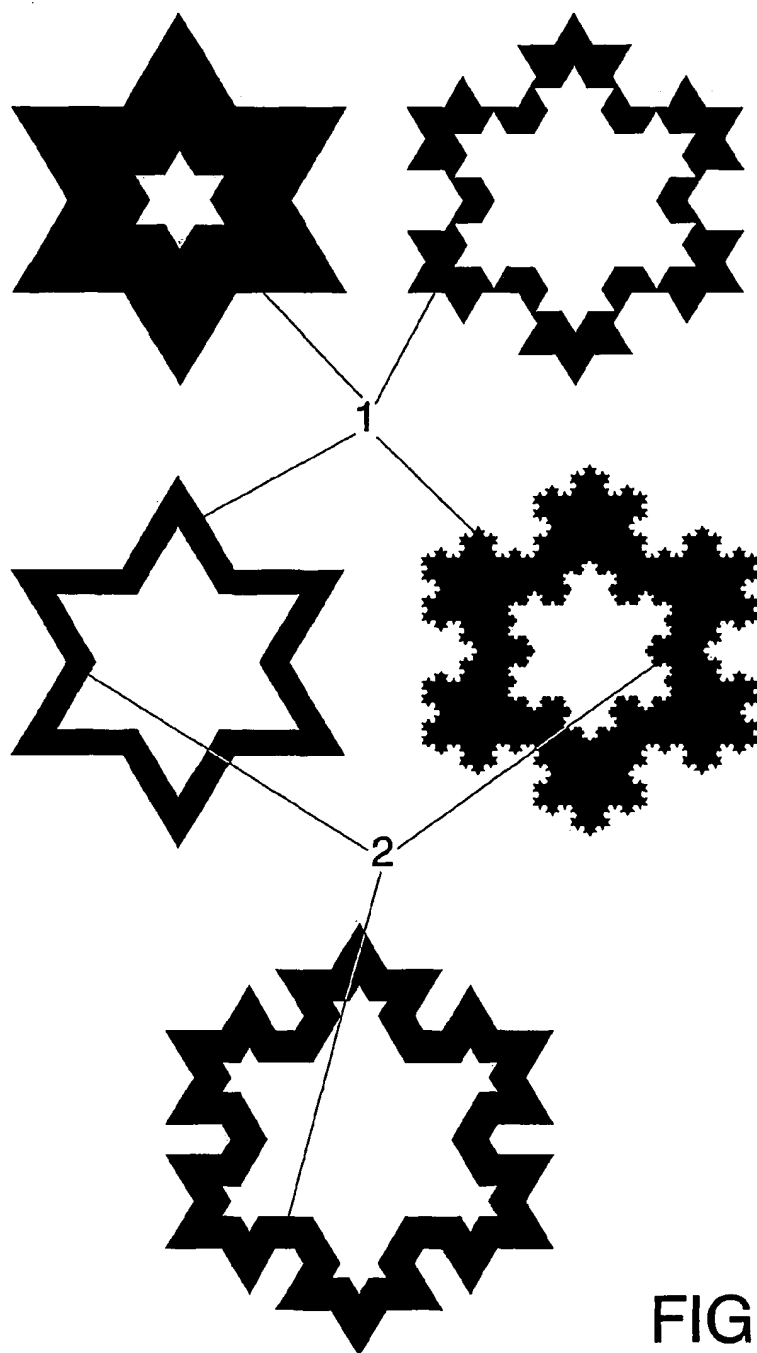


FIG. 3

4/10

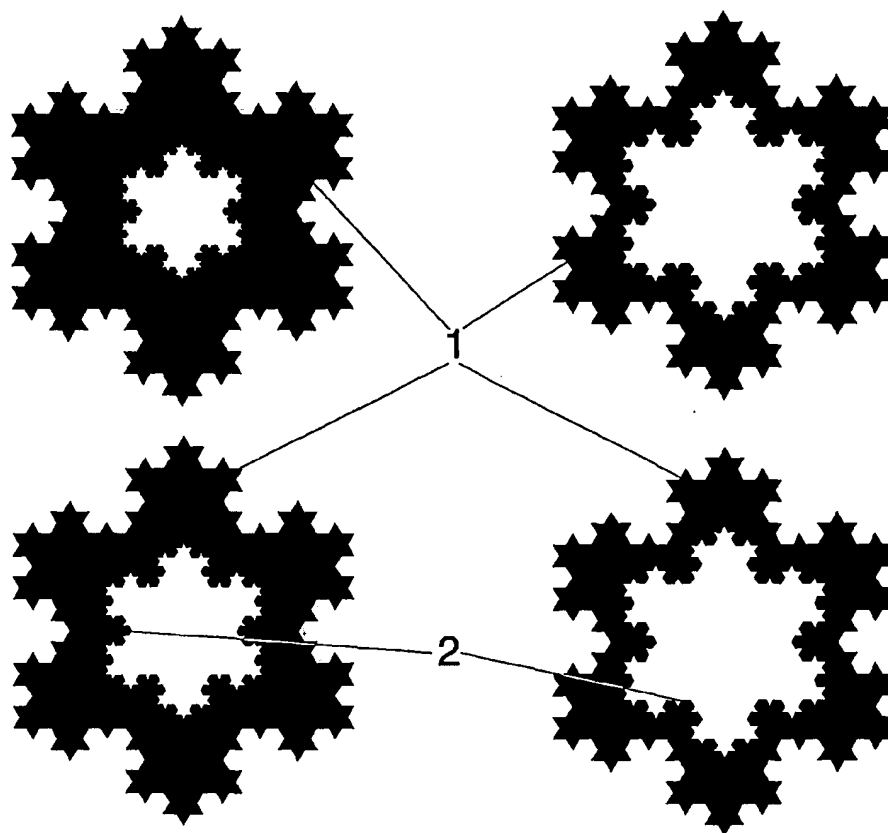


FIG. 4

5/10

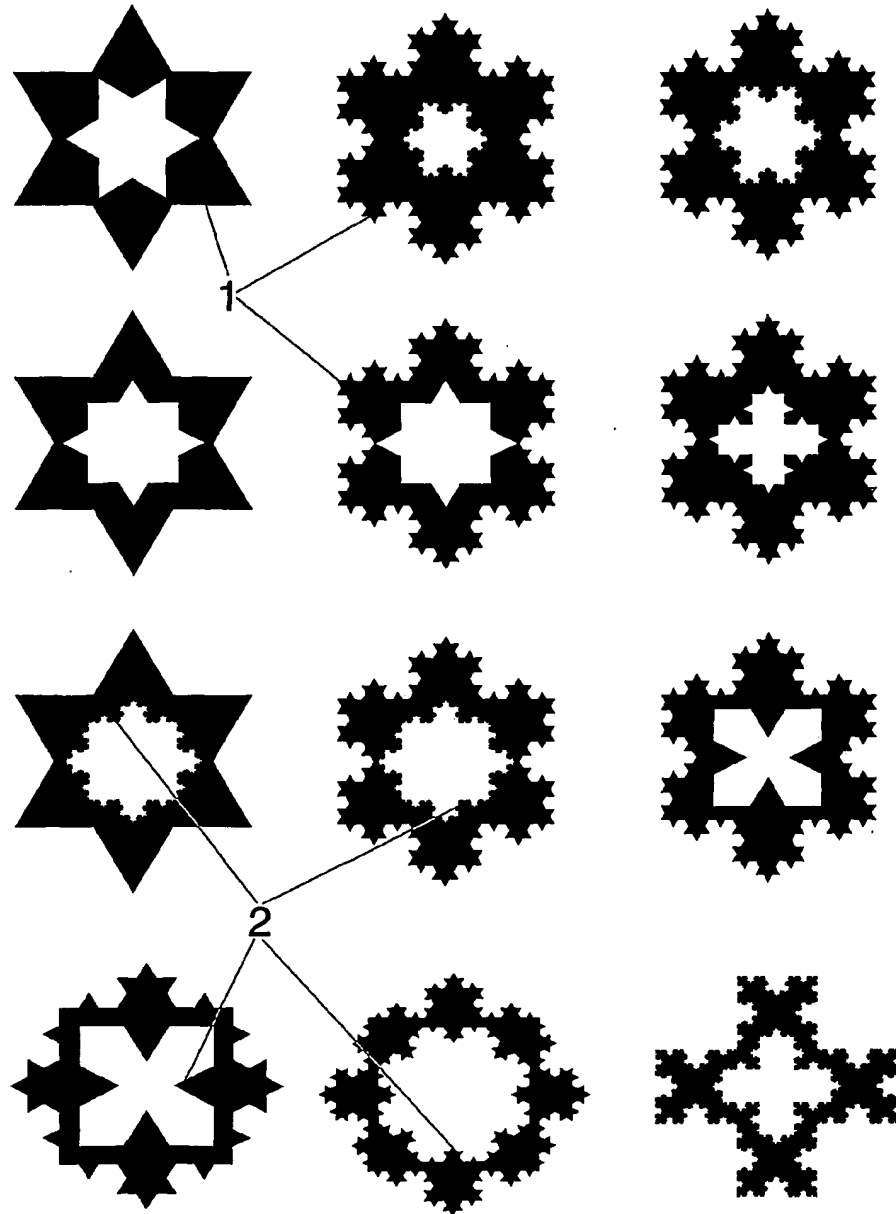


FIG. 5

610

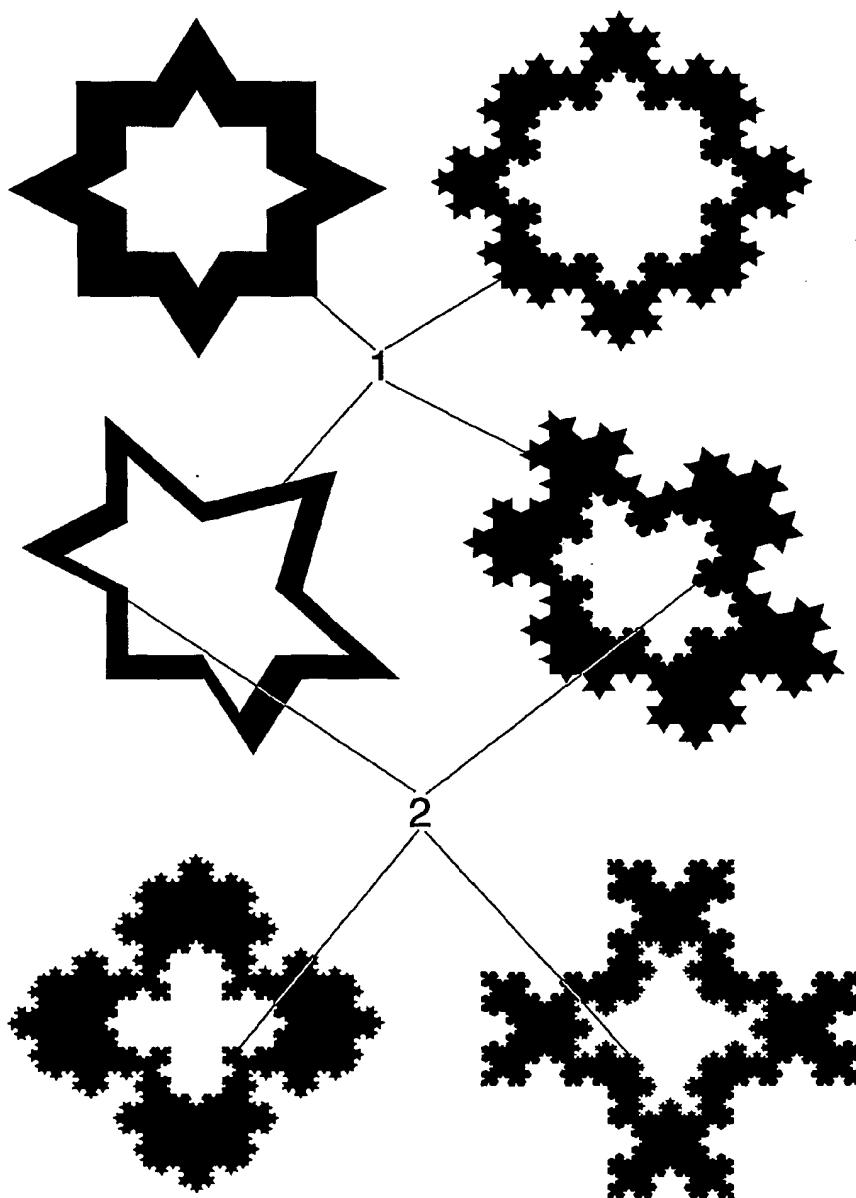


FIG. 6

7/10

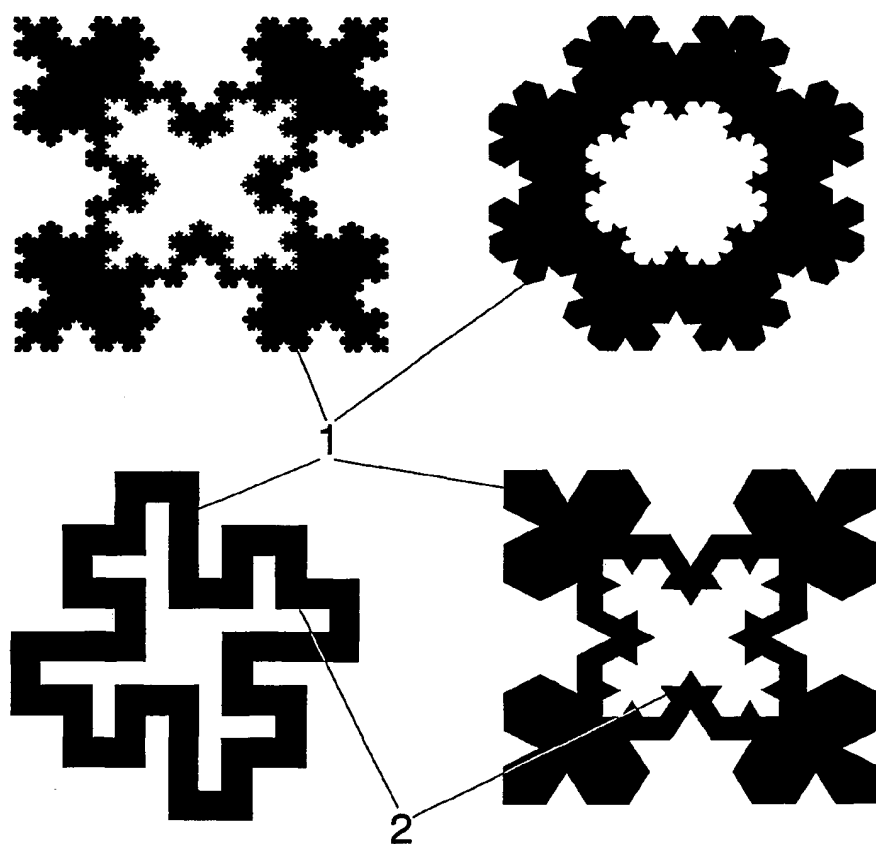


FIG. 7

8/10

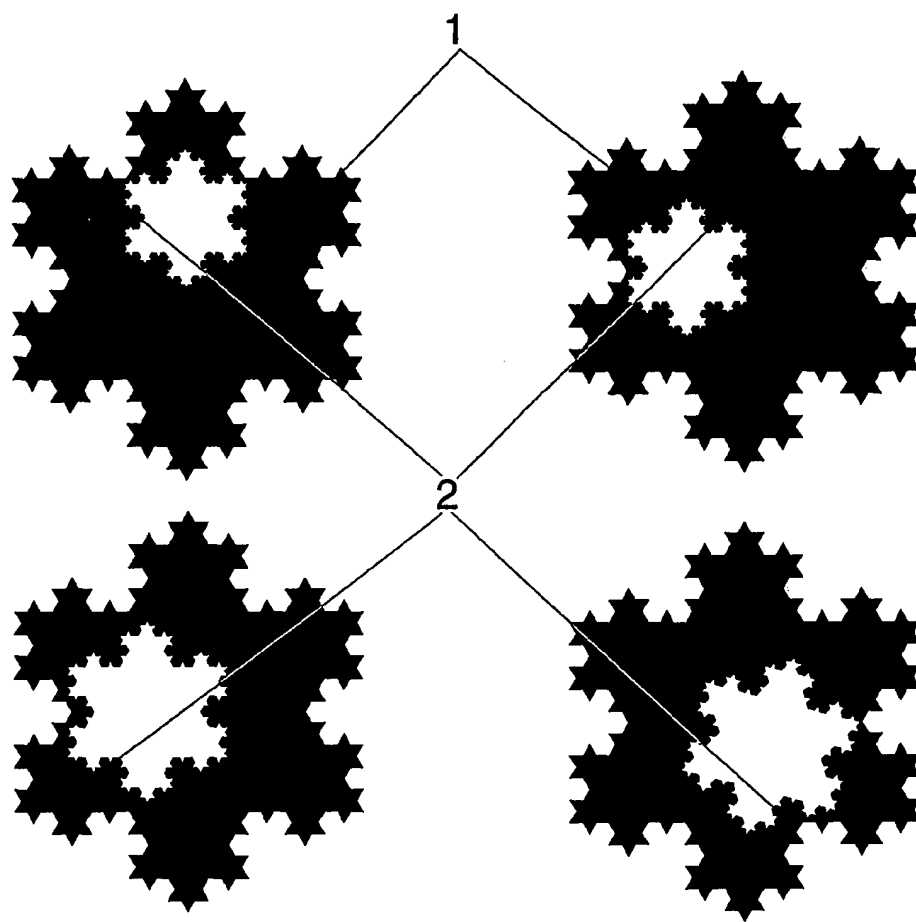


FIG. 8

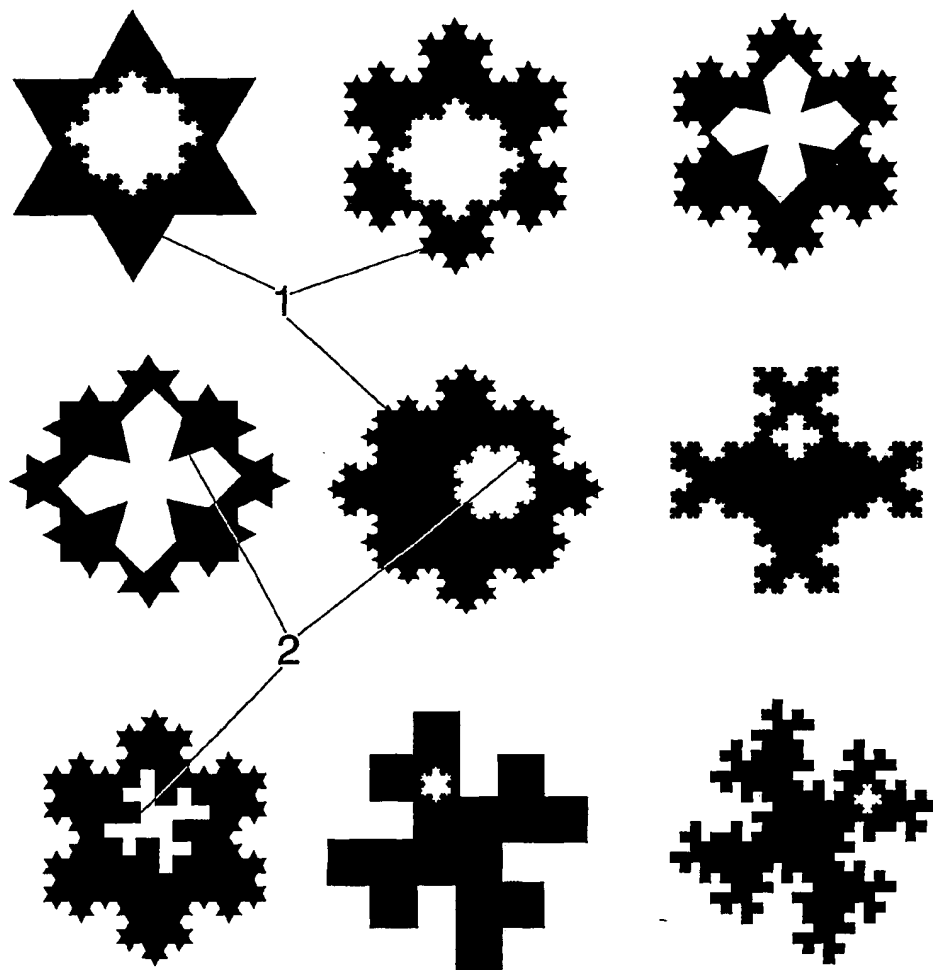


FIG. 9

10/10

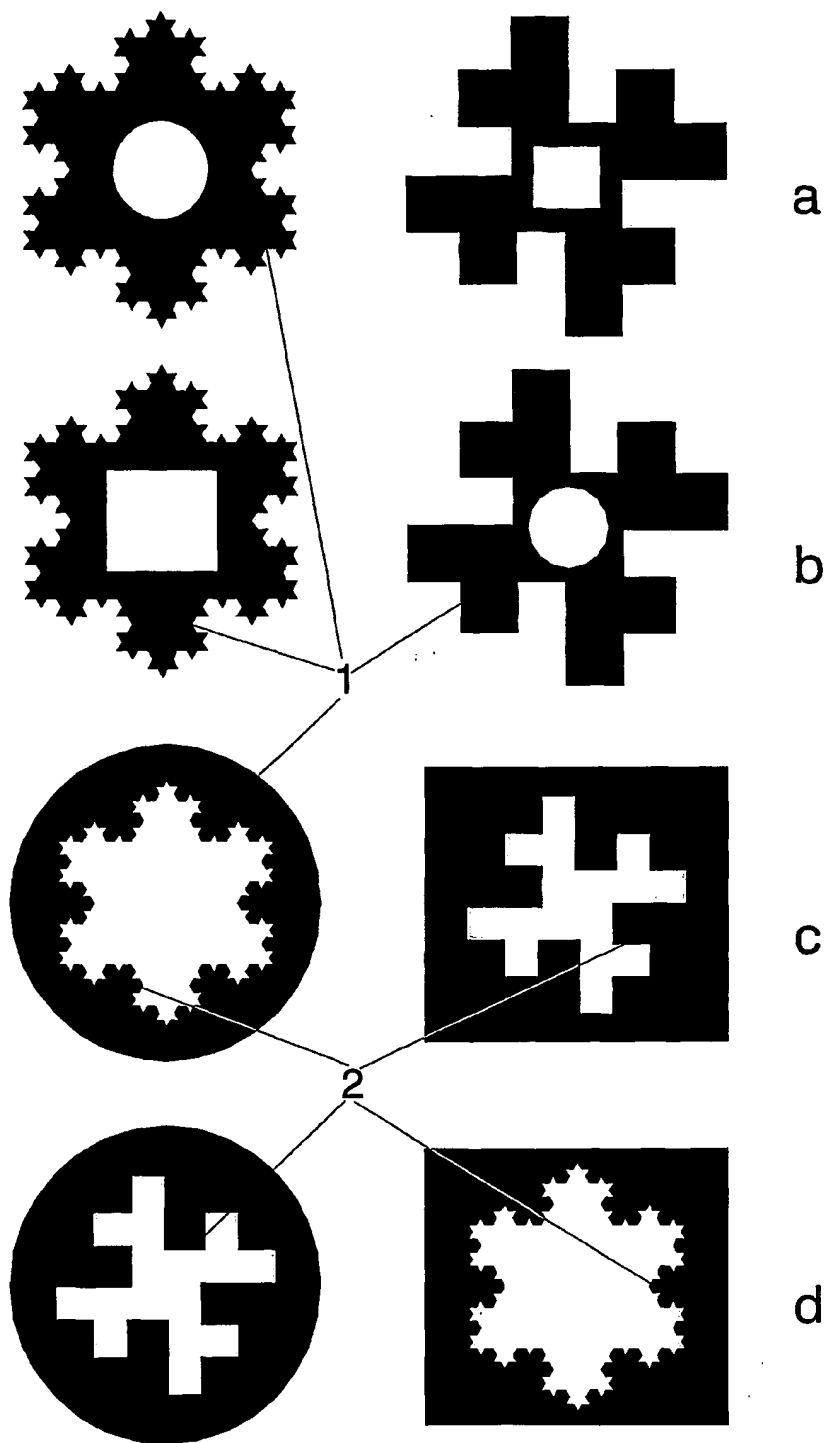


FIG. 10

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/01287

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H01Q1/36 H01Q1/24 H01Q9/04 H01Q1/38		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 H01Q		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ANGUERA J ET AL: "MINIATURE WIDEBAND STACKED MICROSTRIP PATCH ANTENNA BASED ON THE SIERPINSKI FRACTAL GEOMETRY" IEEE ANTENNAS AND PROPAGATION SOCIETY INTERNATIONAL SYMPOSIUM. 2000 DIGEST. APS. SALT LAKE CITY, UT, JULY 16 - 21, 2000, NEW YORK, NY: IEEE, US, vol. 3 OF 4, 16 July 2000 (2000-07-16), pages 1700-1703, XP000993909 ISBN: 0-7803-6370-1 the whole document.	1-6
A	US 6 140 975 A (COHEN NATHAN) 31 October 2000 (2000-10-31) the whole document	1-6
-/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.		
<input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : 'A' document defining the general state of the art which is not considered to be of particular relevance 'E' earlier document but published on or after the international filing date 'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) 'O' document referring to an oral disclosure, use, exhibition or other means 'P' document published prior to the international filing date but later than the priority date claimed 'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention 'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. '&' document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
12 October 2001		22/10/2001
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlean 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Wattiaux, V

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 01/01287

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 99 27608 A (COHEN NATHAN) 3 June 1999 (1999-06-03) the whole document	1-6
A	HARA PRASAD R V ET AL: "Microstrip fractal patch antenna for multi-band communication" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 36, no. 14, 6 July 2000 (2000-07-06), pages 1179-1180, XP006015404 ISSN: 0013-5194 the whole document	1-6
A	US 6 127 977 A (COHEN NATHAN) 3 October 2000 (2000-10-03) the whole document	1-6
A	BORJA C ET AL: "High directivity fractal boundary microstrip patch antenna" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 36, no. 9, 27 April 2000 (2000-04-27), pages 778-779, XP006015180 ISSN: 0013-5194 the whole document	1-6

INTERNATIONAL SEARCH REPORT
Information on patent family members

International Application No

PCT/EP 01/01287

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 6140975	A	31-10-2000	EP	0843905 A1	27-05-1998
			WO	9706578 A1	20-02-1997
			US	6104349 A	15-08-2000
WO 9927608	A	03-06-1999	WO	9927608 A1	03-06-1999
US 6127977	A	03-10-2000	WO	9925044 A1	20-05-1999

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 August 2002 (15.08.2002)


PCT

(10) International Publication Number
WO 02/063714 A1

- (51) International Patent Classification⁷: H01Q 1/36, 1/24, 9/04, 1/38
- (21) International Application Number: PCT/EP01/01287
- (22) International Filing Date: 7 February 2001 (07.02.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): FRAC-TUS, S.A. [ES/ES]; Alcade Barnils, Edificio Testa, mod. C3, Parque Empresarial San Joan Despi, E-08190 San Cugat Del Valles (ES).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): ANGUERA PROS, Jaume [ES/ES]; Pssg. Blasco Ibañez, 15, E-12500 Vinarós
- (ES). PUENTE BALIARDA, Carles [ES/ES]; Alcade Barnils, Edificio Testa, mod. C3, Parque Empresarial San Jose Despi, E-08190 San Cugat Del Valles (ES). BORJA BORAU, Carmen [ES/ES]; T'vra. de Dalt, 67, E-08024 Barcelona (ES).
- (74) Agent: CARPINTERO LOPEZ, Francisco; Herrero & Asociados, S.L., Alcalá 35, E-28014 Madrid (ES).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: MINIATURE BROADBAND RING-LIKE MICROSTRIP PATCH ANTENNA

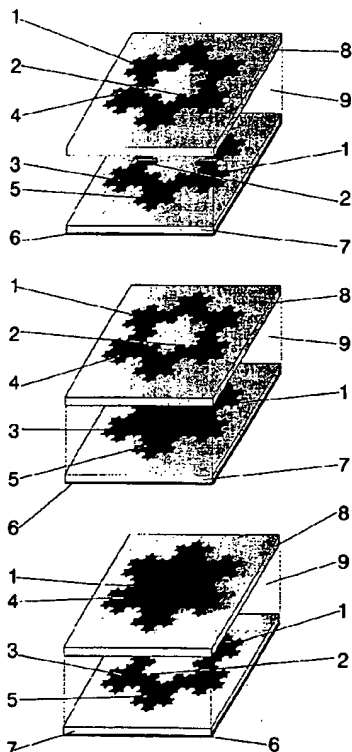

(57) Abstract: A miniature broadband stacked microstrip patch antenna formed by two patches., an active and a parasitic patches, where at least one of them is defined by a Ring-Like Space-Filling Surface (RSFS) being this RSFS newly defined in the present invention. By means of this novel technique, the size of the antenna can be reduced with respect to prior art, or alternatively, given a fixed size the antenna can operate at a lower frequency with respect to a conventional microstrip patch antenna of the same size and with enhanced bandwidth. Also, the antennas feature a high-gain when operated at a high order mode.

WO 02/063714 A1

BEST AVAILABLE COPY



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(15) Information about Correction:

see PCT Gazette No. 52/2003 of 24 December 2003, Section II

Published:

— *with international search report*

(48) Date of publication of this corrected version:

24 December 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.